




Installation Instructions of TPE CC1496 HP P4014/4015/4515 'X' VERSION HIGH YIELD TONER HOPPER

OEM HP P4014 (CC364A)


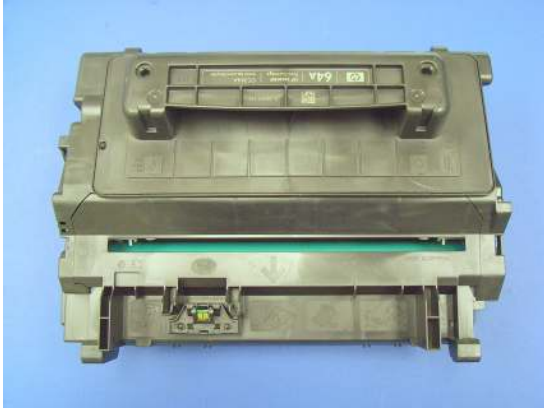


T.P.E. CC1496 Enlarged Toner Hopper for HP P4014/4015/4515 Printer



T.P.E. CC1496 HP P4014/4015/4515 'X' VERSION HIGH YIELD TONER HOPPER includes the follows:


1. P4014/4015/4515 'A' Version Enlarged Toner Hopper. This includes Two Agitator Bars/ Two Agitator Knobs/ Toner Low Contact Plate/ Toner Low Sensor Bar/ Toner Low Sensor Bar Sleeve.
2. Gear sets for conversion "A" Version End Cap to Fit in Enlarged Hopper.
3. Filler Cap.

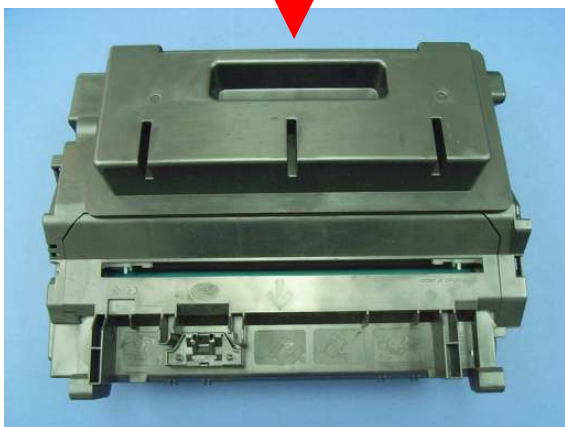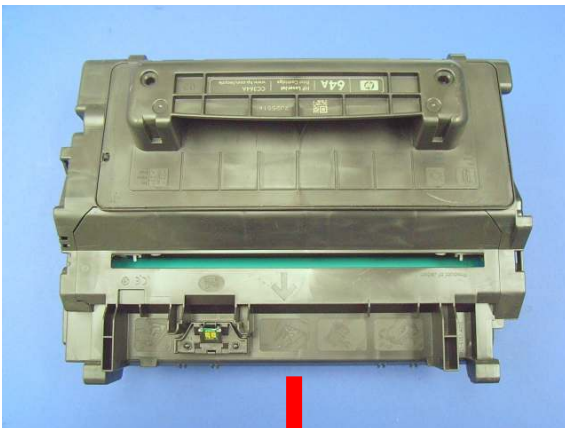

This option allows people to use an OEM CC364A Standard Yield cartridge fit with T.P.E. CC1496 HP P4014/4015/4515 'X' VERSION HIGH YIELD TONER HOPPER to have nearly same maximum amount of toner as OEM CC364X High Yield cartridge. This also allows the Enlarged Cartridge to fit inside the P4014/4015/4515 printer.

We will illustrate the steps using a CC1496 HP P4014/4015/4515 'X' VERSION HIGH YIELD TONER HOPPER.

Procedures

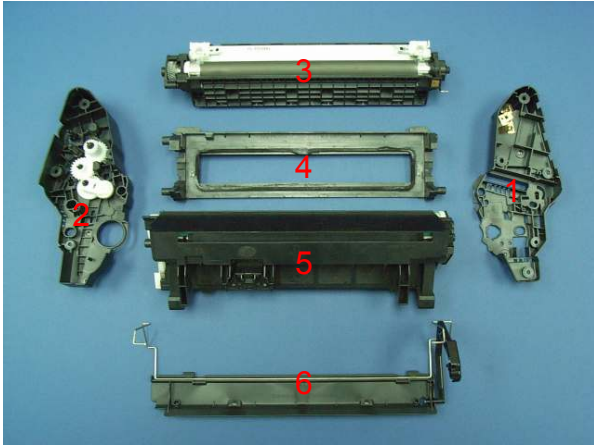

Step 1

Prepare the OEM 1) Left end caps, 2) Right end cap, 3) Mag Roller assembly, 4) Mag Roller Housing, 5) Waste toner hopper section, 6) OPC Drum Shutter from OEM CC364A hopper and carefully clean all components thoroughly.




Step 2

The photo shows a CC1496 HP P4014/4015/4515 'X' VERSION HIGH YIELD TONER HOPPER. Seal the hopper first, then fill hopper with toner and insert the filler cap.



Step 3


Place the Mag Roller Housing on the Toner Hopper.

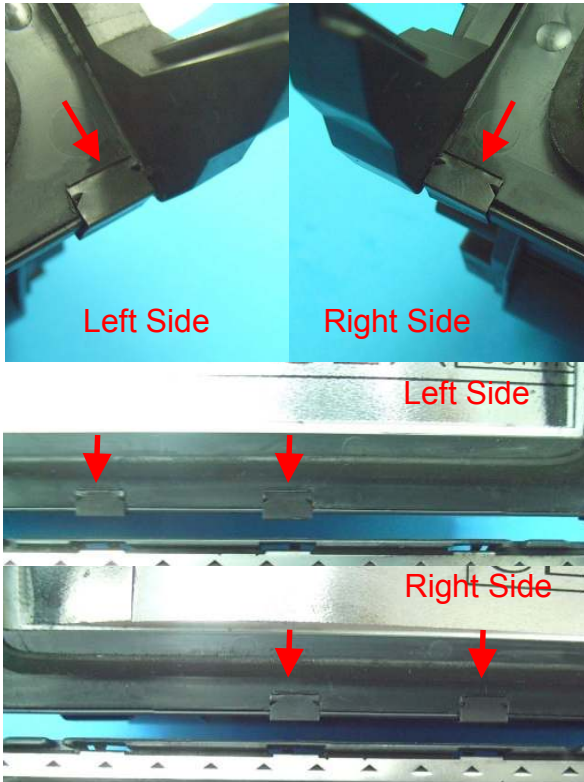

Step 4


Assemble the T.P.E. CC1496 HP P4014/4015/4515 'X' VERSION HIGH YIELD TONER HOPPER with the T.P.E. CC1497 HP P4014/4015/4515 TOP METAL CLIP (3 Pcs) and CC1498 HP P4014/4015/4515 BOTTOM METAL CLIP (8 Pcs) to the OEM Mag Roller Housing.

Clip the Mag Roller Housing and Toner Hopper together by putting the CC1498 HP P4014/4015/4515 BOTTOM METAL CLIP on the left and right bottom as in the photo above. Make sure the shorter leg of the CC1498 clip is on the front side of the Mag Roller Housing. Put CC1498 HP P4014/4015/4515 BOTTOM METAL CLIP on the bottom of the MAG ROLLER Housing and Toner Hopper. Make sure they are placed in the correct position by checking with the Mag Roller Housing as in the photo above. The shorter leg of the CC1498 clip must be on the front side of the Mag Roller Housing.

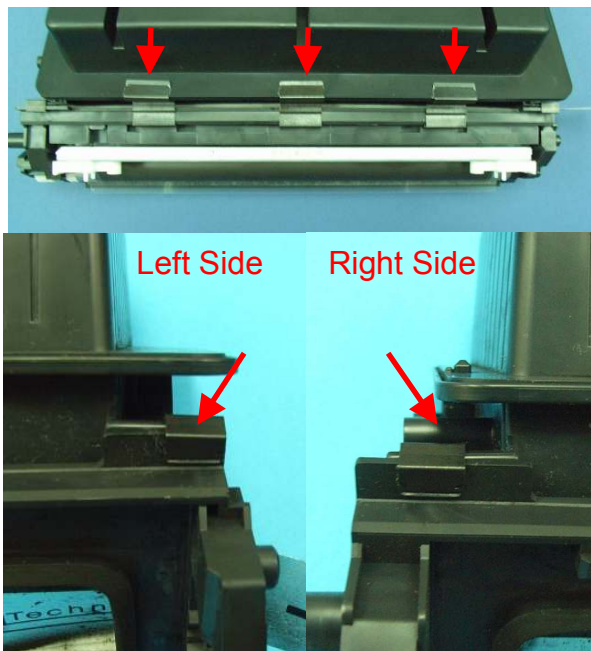


Step 5

Put one CC1498 HP P4014/4015/4515 BOTTOM METAL CLIP on each side of the left and right top of the Mag Roller Housing and Toner Hopper and put the CC1497 HP P4014/4015/4515 TOP METAL CLIPS on the top of the Mag Roller Housing and Toner Hopper as in the photo above.

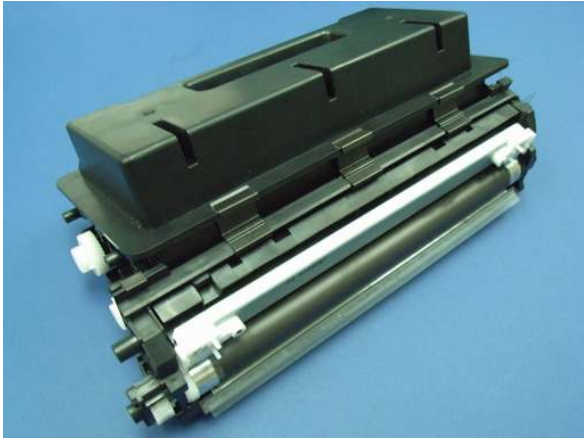


Step 6

Put the Mag Roller Assembly into the May Roller Housing.

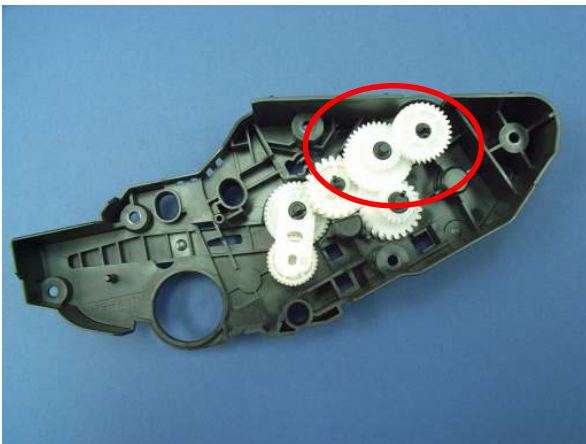

Step 7

Prepare the OEM HP P4014/4015/4515 Right End Cap for reassembly to the hopper. Add the T.P.E. Gear sets for conversion "A" Version End Cap to Fit in Enlarged Hopper on the right end cap.

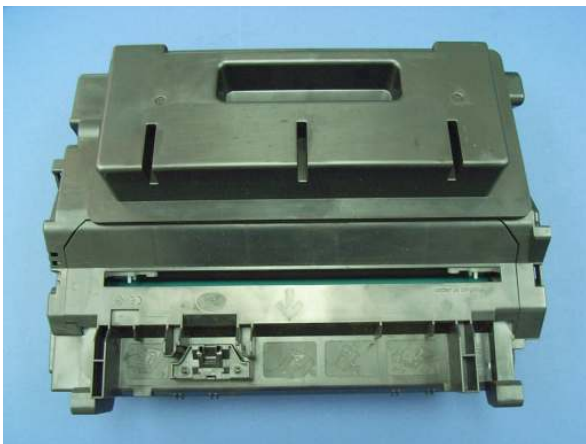

Step 8

Assemble the Hopper side with a cleaned and re-assembled Waste Hopper together then insert and screw the left and right end cap on each side to hold them together. The conversion is now completed.