
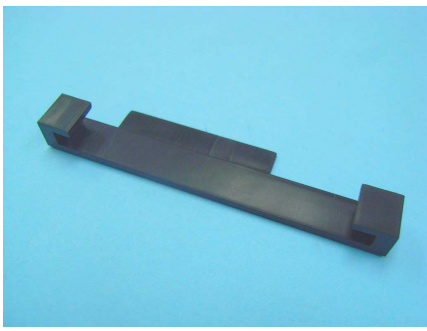
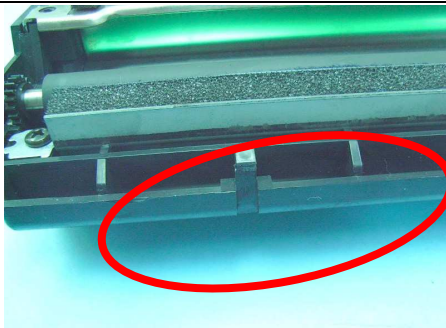
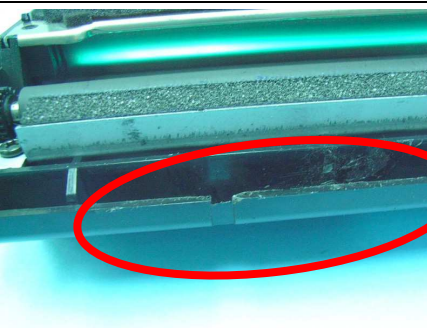


Conversion of an OEM Samsung ML1710/1510/1520 SAMSUNG SCX-4016/4216/4100 SAMSUNG SF-560/ XEROX PHASER 3120/XEROX WC PE16/XEROX PHASER 3115/3130/LEXMARK X215/RICOH FX16/RICOH FAX 1130L Cartridge to a SCX4200 and SF-560R Cartridge by using T.P.E. CC1326 Samsung SCX-4200 Top Cover and PCB Positioner.

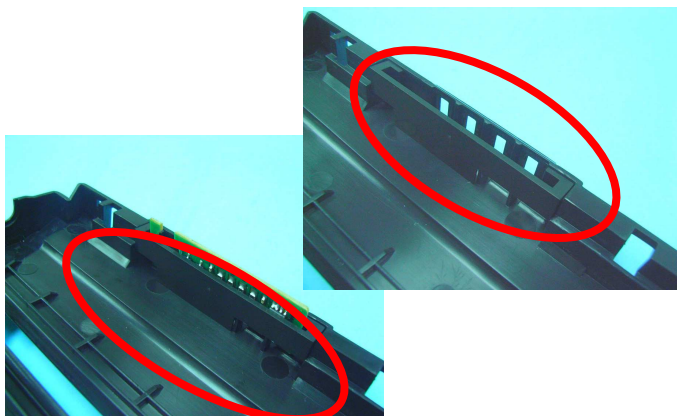

	
<p>CC1326 Samsung SCX-4200/SF-560R Top Cover with Clip Positioner</p>	<p>PCB Positioner for Converting to a SCX4200 /SF-560R cartridge</p>

These instructions provide the information required to convert the above OEM cartridges to a SCX4200 and SF-560R Cartridge by using the T.P.E. CC1326 Samsung SCX-4200/SF-560R Top Cover and the PCB Positioner.

Procedures

	
--	---

Step 1: Machine off the hook and cut off the rib completely on the above cartridges' bottom section as shown in the photo. This operation will allow the bottom section to have the space for the chip.



	
--	--

Step 2: Glue the PCB Positioner onto the CC1326 Samsung SCX-4200/ SF-560R Top Cover PCB slot, and put a PCB inside the positioner.

Step3: Fully assemble the T.P.E. CC1326 Samsung SCX-4200 / SF-560R Top Cover to the base. A conversion is completed and converted to a SCX4200/ SF560R Cartridge with chip.


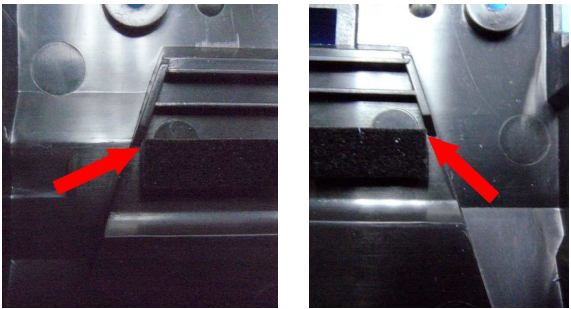
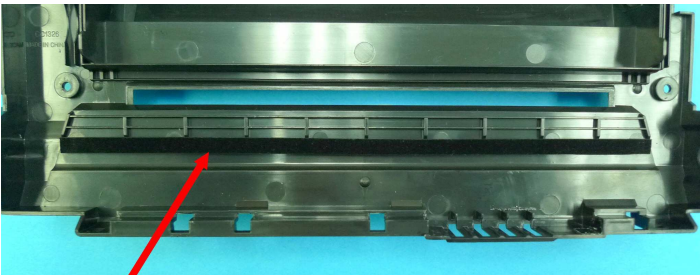

Please note that the positioner is now included with the top. Initially it was not and is now available separately as T.P.E. part number CC1396 PCB Positioner for Converting the above cartridges to SCX 4200 / SF-560R.

Conversion of an OEM Samsung SCX4300 cartridge to a Samsung SCX-4200/SF-560R Cartridge by using the T.P.E. CC1326 SAMSUNG SCX-4300/4200/SF-560R UNIVERSAL AND CONVERSION TOP COVER.

	
<p>CC1326 SAMSUNG SCX-4300/4200/SF-560R UNIVERSAL AND CONVERSION TOP COVER</p>	<p>CC1673 Samsung SCX-4300 PCR Top Felt</p>

These instructions provide the information required to convert the OEM Samsung SCX4300 cartridges to a universal Samsung SCX4300 Cartridge by using the T.P.E. CC1326 SAMSUNG SCX-4300/4200/SF-560R UNIVERSAL AND CONVERSION TOP COVER and an addition Top Felt as shown above.

Procedures

	
<p>Step 1 Unscrew the OEM Samsung SCX4300 Left End Cap and Top Cover, take them out and keep the Left End Cap and all the screws.</p>	<p>Step 2 Follow the arrowed position and put the T.P.E. Samsung SCX-4300 PCR Top Felt for PCR. The PCR Top Felt in the position shown.</p>
	
<p>Step 3: This photo shows how the Top should look after putting on the T.P.E. Samsung SCX-4300 PCR Top Felt.</p>	<p>Step 4: Fully assemble the T.P.E. CC1326 Samsung SCX-4300/4200/SF-560R Top Cover and OEM Left End Cap to the base. The conversion is completed.</p>