

Installation Instructions For Lexmark MS310 Series Toner Hopper



1 / Install the wrench :



11 / Fixing the wrench



12 / Completed installation of the wrench

2 / Install the stirring stand on left side :



21 / Set down the agitator gear and cover



22 / Fixing screws to finish

3 / Install the toner outlet cover :



31 / Fixing the linkage




32 / Fixing the linkage



33 / Fixing the drive linkage



34 / Install the drive spring

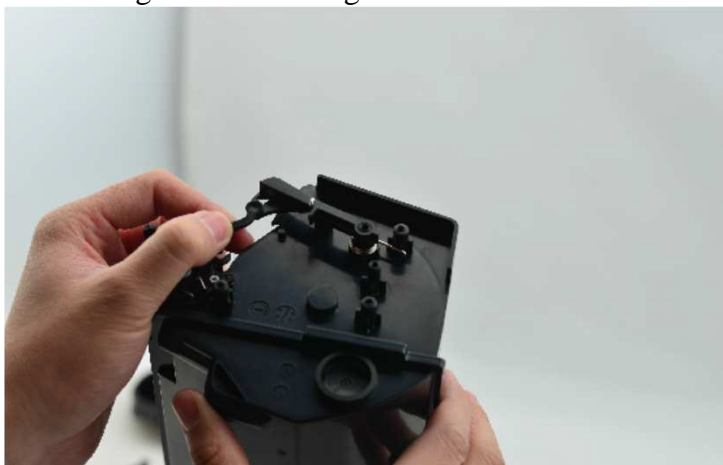

35 / Fixed the drive linkage to cartridge



36 / Fixing the toner outlet cover



37 / Completed installation the toner outlet cover

4 / Install the toner outlet cover of drive linkage :



41 / Install the drive spring and drive linkage



42 / Fixing the drive spring




43 / Install another drive spring and drive sliding



44 / Link spring and drive sliding




45 / Link the drive linkage and drive sliding

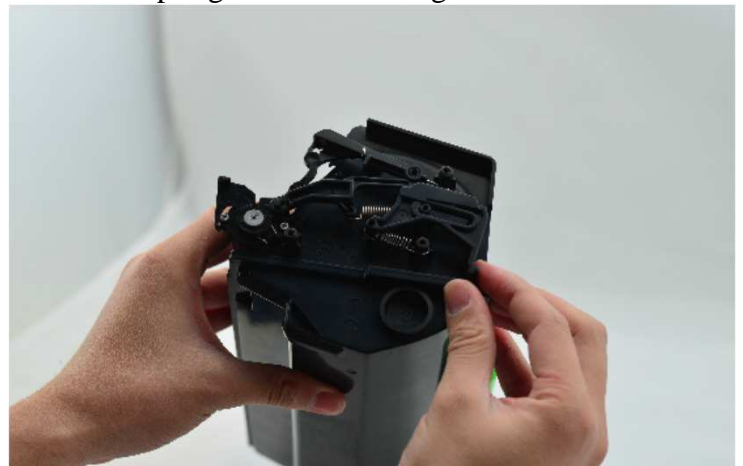

46 / Completed installation as shown

5 / Install the chip holder :

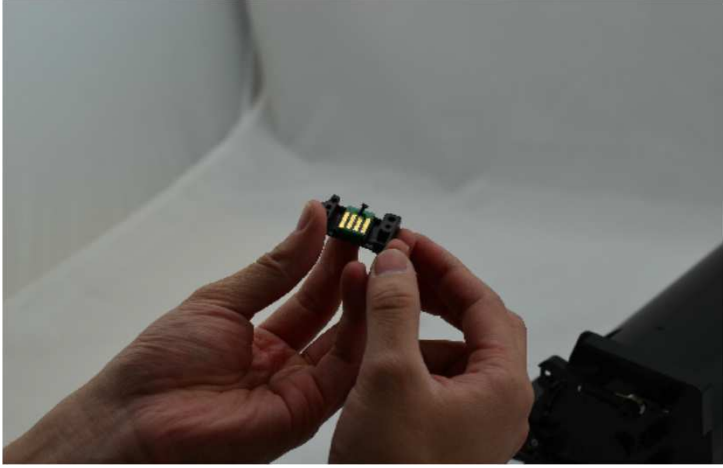

51 / Put the chip fixed to chip holder



52 / Place the chip holder on the right end cap

53 / Fix screws of the chip holder from inside side

6 / Fill cartridge with your toner :

7 / Install the right end cap :



71 / Install the right end cap (push on trigger)



72 / Lock that end cap by fixing 3 screws

Cartridge is now ready !!!!

