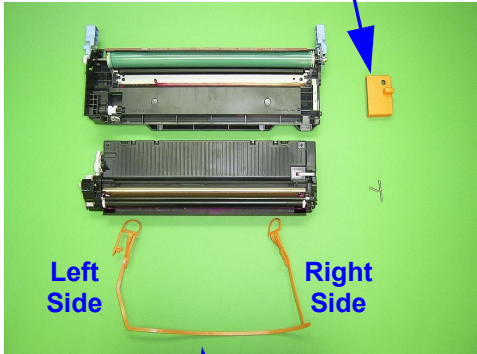
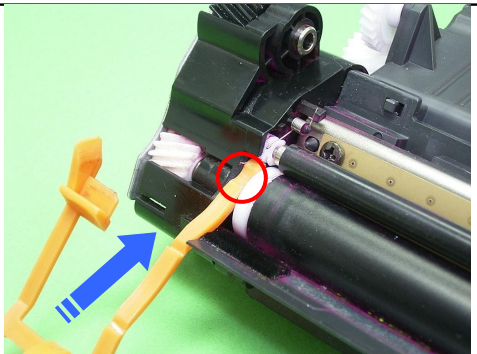
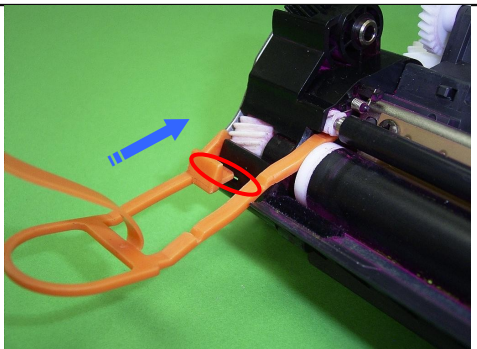
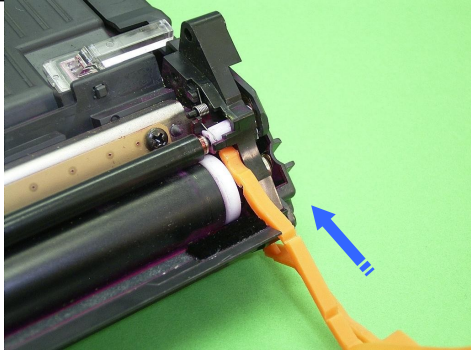
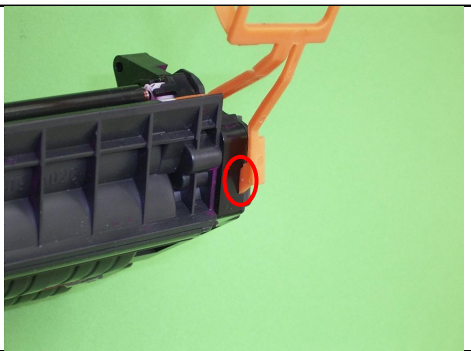
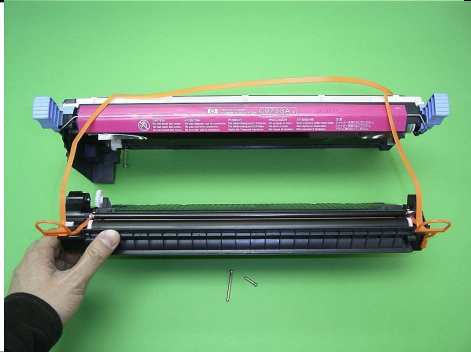
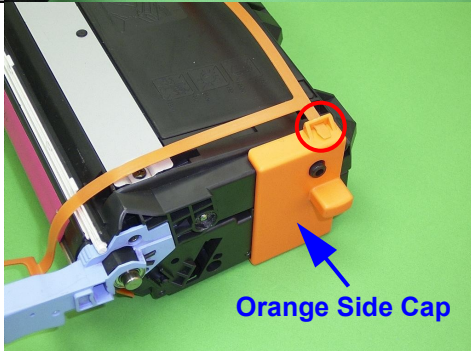
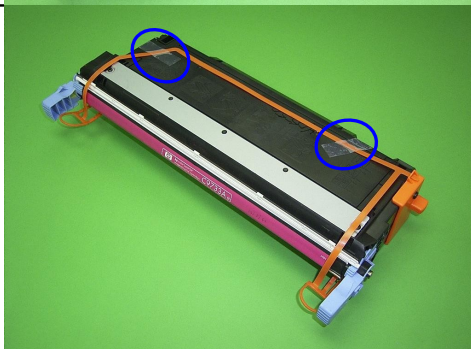


## HP5500 Shipping Lock [CC-1055] Installation Instruction

<p>1)</p>  <p>Orange Side Cap</p> <p>Left Side</p> <p>Right Side</p> <p>Orange Locking Strap</p>	<p>One major function of this shipping lock is to prevent the developer roller and the toner charging roller from contact during transportation.</p> <p>To install the CC-1055 shipping lock, first separate the toner hopper reservoir and waste section of the cartridge as shown in photo.</p> <p>T.P.E. shipping lock CC-1055 includes an orange locking Strap and an orange side cap as indicated in the photo. Firstly, define the left and right side of the locking strap as the photo.</p>
<p>2)</p> 	<p>Start from the left side of the toner hopper reservoir. Insert the orange flat head strip of the left side of the locking strap into the bottom of the toner charging roller saddle next to the developer roller spacer. Push the orange strip in the direction of arrow until the toner charging roller saddle raises up and sits onto the concave recess area indicated by the red circle.</p>
<p>3)</p> 	<p>Insert the head of the other strip into the slot at the location indicated by the red circle.</p>

#### Installation Instruction 4

<p>4)</p>		<p>On the right side of the toner hopper reservoir, repeat the same operation as the left side of the toner hopper reservoir. Insert the orange flat head strip of the right side lock belt into the bottom of the right side toner charging roller saddle next to the developer roller spacer. Push the orange strip in the direction of the arrow until the toner charging roller saddle raises up and sits onto the concave recess area as describe in (2). Now the whole toner charging roller should have been raised up a small amount to create clearance with the developer roller.</p>
<p>5)</p>		<p>Insert the other pointed head strip into the small slot at the bottom of the right side toner hopper reservoir indicated by the red circle.</p>
<p>6)</p>		<p>Assemble the waste section back to the toner hopper reservoir with the large orange locking strap loop placed over the top of waste section as indicated in the photo.</p> <p>Insert the 2 pivot pins to fix the waste section and toner hopper reservoir back together.</p>
<p>7)</p>	 <p style="text-align: center;"><b>Orange Side Cap</b></p>	<p>Then snap the orange side cap provided onto the right side of the complete cartridge as indicated in the photo. Connect the soft plastic strap end into the small slot on the orange side cap as indicated by the red circle.</p>
<p>8)</p>		<p>Finally apply two adhesive tapes to hold the locking strap loop in place.</p> <p>This completes the installation process</p>